

LITEON GROUP

## EVQC060

# 60 kW Stationary DC EV Quick Charger

### Description

The EVQC060 is an all-in-one DC quick charger that enables up to 60 kW continuous charging output. This product also offers highly flexible and field configurable Vac input power, which allows accepting the most common distribution voltages, thus reducing overall infrastructure and construction costs.

All of Power Innovations International's EV chargers have industry-standard connectivity for fast charging, remote services, and software updates.

### Features and Benefits

- Highly flexible power input with no de-rating
- Field-replaceable power modules
- Greater than 1 million hours MTBF on PSU topology
- IP54/NEMA 3S enclosure
- Multiple payment/authorization methods
  - RFID and credit card
- Remote upgrades via over-the-air updates


### Applications

- Residential and multi-unit dwellings
- EV infrastructure and service providers
- Retail and hospitality
- OEM test facilities
- Public and commercial buildings
- Municipalities
- Small, mid, and large fleets & depots



## Specifications

Input Voltage	240 Vac Single Phase 208 or 240 Vac 3-Phase Delta 480 Vac 3-Phase Wye
Input Current	250 A maximum (240 Vac Single Phase) 175 A maximum (208 or 240 Vac 3-Phase Delta) 100 A maximum (480 Vac 3-Phase Wye)
Output Power	60 kW maximum
Output Voltage	250 to 900 Vdc (400 & 800 Vdc nominal)
Efficiency	95%
Charging Connector	CCS1
Charging Cable Length	5m
Charging/Data Protocols	DIN 70121, ISO 15118-2, and OCPP 1.6J or 2.0.1 enabled
Network Interface	Cellular 4G LTE, WiFi
RFID	ISO/IEC 14443 A/B, ISO 15393, NFC Reader Mode
Display	7" color LCD
Operational Temperature	-35 °C to +50 °C
Storage Temperature	-40 °C to +80 °C
Relative Humidity	Up to 95% non-condensing
Altitude	3000 m (9845 ft)
Enclosure Rating	NEMA 3S; IP54
Impact Resistance	IK10
Weight	235 kg (Charger only)
Mounting	Pedestal sold separately

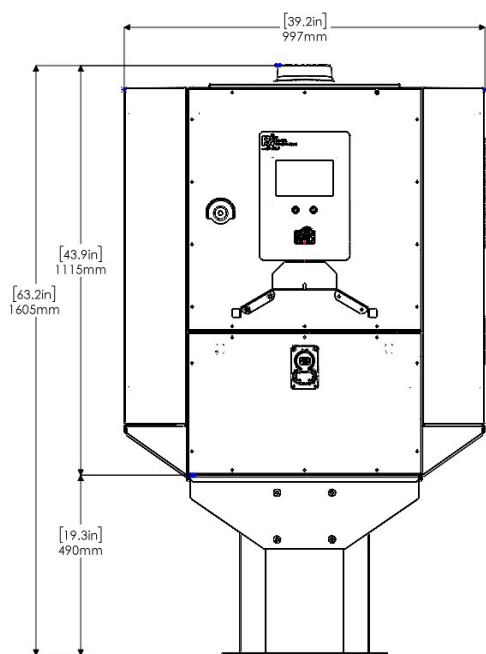

Product Dimensions (in)

